

CRS-1002

Underground Cable Pulley

- ◆ To prevent the cable to rub against the ground.


Item	L(mm)	W(mm)	H(mm)	A(mm)	Weight (kg)
CRS-1002	300	255	270	175	5.3

CRS-3600

3-Strunge Rolling Wheel

- ◆ Connecting part can freely to exchange the angle, and can do times of connection.
- ◆ Rolling wheel with the double layer design. The hole diameter can be adjusted by the working requirement. The wire pulling direction can also be used even it is not on the level.
- ◆ Suitable for working in the underground port.

Item	Capacity (Kg)	Single Size (mm)	Rolling Wheel (mm)	Weight (kg)
CRS-3600	600	460X165X140	φ150Xφ50X128	9.3

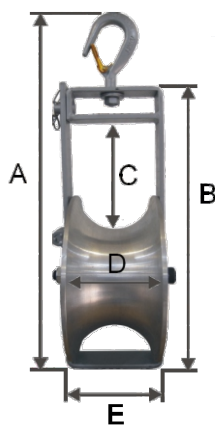

Cable pulley

- ◆ Used in overhead cable laying.

Item	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	Weight (kg)
MINI	220	125	—	62	75	0.85
CRS-1006	290	190	—	85	110	2.2
CRS-1006A	405	260	—	105	130	5.4
CRS-1008	665	520	140	142	165	12

CRS-1009

Four Wheel Pully

- ◆ Suitable for working in the underground port.

Item	A(mm)	B(mm)	C(mm)	Weight (kg)
CRS-1009	155	155	260	2

