

SPAT

單提氣動泵浦
Portable Air Pump



SPAQ

框架型氣動泵浦
Frame Air Pump



- 不銹鋼底座及框架。
- 便於提攜。
- ※Steel base and frame.
- ※Easy to carry.



SPAW

試水泵浦
Hydrostatic Pump



框架型 Steel frame 標準型 Standard type

- 具三點組合、濾水調壓、自動潤滑、洩壓閥。
- 具進水過濾器，過濾雜質保護機體。
- 不銹鋼底座。 ● 液體可為水或液壓油。
- ※Air units (F.R.L.Unit) provide filter、regulator and lubricate
- ※Input water filter which provide protect.
- ※Steel base.
- ※Liquid can be oil or water.

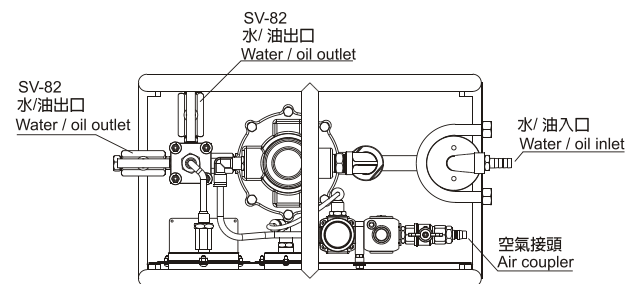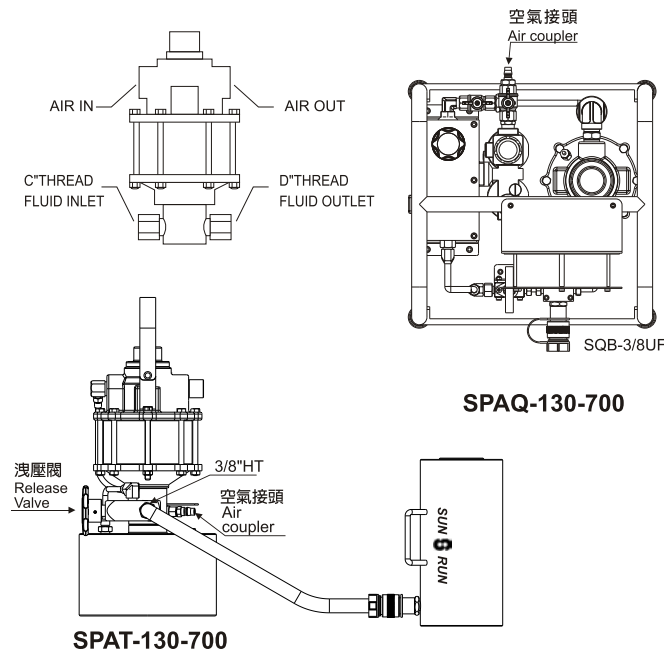

SPAW-130-300F

SPAW-130-700F

說明 Description	型號 Model Number	壓縮比 Compress Ratio	出油量 Output oil (cm³/per stroke)	工作壓力 Work press. (bar)	使用空壓 Air press. (kgf/cm²)	儲油量 Equipped reservoir (c.c)	重量 Weight (kg)	外型尺寸 Dimensions		
								C	D	(mm)
單提型 Portable	SPAT-130-700	1:150	2.5	700	5~7	2000	17.7	—	1/2"PT-14	Ø220x420L
單提型 Portable	SPAT-130-700-4K	1:150	2.5	700	5~7	4000	12	—	1/2"PT-14	Ø220x530L
不銹鋼框架 Steel Frame	SPAQ-130-700F	1:150	2.5	700	5~7	5600	25	1/4PT-19	9/16-18UNF	400*400*420
不銹鋼框架 Steel Frame	SPAQ-180-700F	1:150	9.5	700	5~7	5600	28	1/4PT-19	9/16-18UNF	500*500*520
標準型 Standard type	SPAW-130-300L	1:60	6.4	300	5~7	—	15.7	1/4PT-19	9/16-18UNF	650*300*300
不銹鋼框架 Steel Frame	SPAW-130-300F	1:60	6.4	300	5~7	—	18.0	1/4PT-19	9/16-18UNF	500*300*420
不銹鋼框架 Steel Frame	SPAW-130-700F	1:150	2.5	700	5~7	—	18.0	1/4PT-19	9/16-18UNF	

※油箱可以需求訂製
※Reservoir will be changed by user.

※重量及外型尺寸依油箱改變
※Weight and dimension will be changed by reservoir alter.

SPA-554TQJ 氣動油壓泵浦


- 兩段式高效能泵浦。
- 空氣驅動壓力3~8bar。
- 最大輸出壓力：700bar。
- 外部調壓。
- 4hp強力馬達。
- 內建式回油釋放閥保護油壓工件。
- 適用於各種液壓舉升工具。
- 不銹鋼框架便於提運。

Hydraulic Air Pump


- ※2-speed pump drives single -or double-acting cylinders, delivering a high volume of oil .
- ※Air is the preferred source of power which supply require 3~8bar.
- ※Max.Pressure : 700bar.
- ※External adjustable pressure regulator
- ※Powerful 4 hp motor starts under load.
- ※Retract side internal relief valve protects tool.
- ※Just use with Hydraulic lift applications.
- ※Stainless frame easy to carry.

典型配置
單動油壓缸配置

Typical Set-up
Hook-up for single-
acting cylinders.

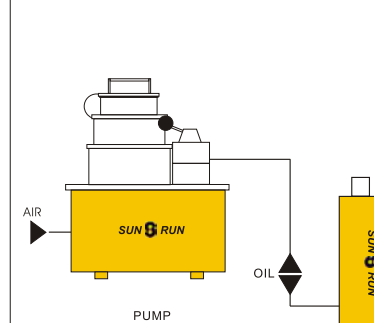
典型配置
雙動油壓缸配置

Typical Set-up
Hook-up for double-
acting cylinders.

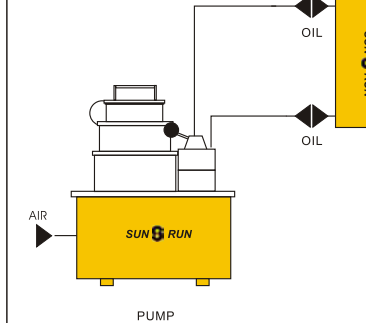選配
Pressure Gauge

G=充油式壓力錶
Pressure Gauge

泵浦基本閥型 BASIC PUMP VALVE	適用油壓缸 Used with cylinder		閥作用 Valve Function		
	單動 Single	雙動 Double	上升 Up	下降 Down	中斷 Stop
手動三口方向閥 Manual 3 way Valve	●	●	●	●	●
手動四口方向閥 Manual 4 way Valve	●	●	●	●	●

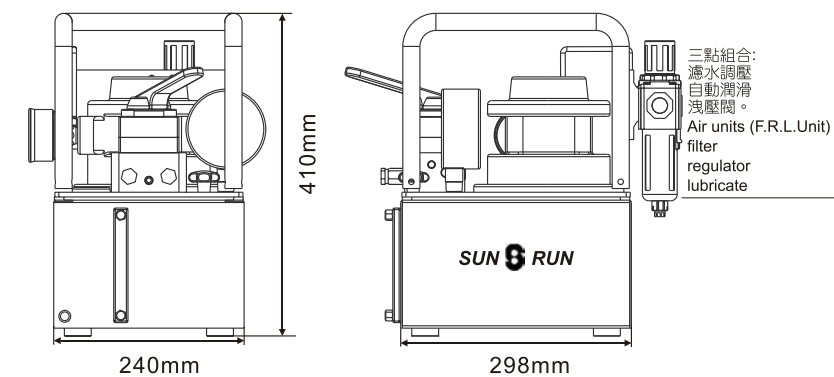

型號 Model Number	泵浦速度 Pump Type	噪音值 dBA at Idle and 700bar	馬達 Motor kW (hp)	適用油壓缸 Used with cyl.	流量 Flow rate @115VAC(L/min)				油箱 Oil tank (L)	重量 Weight (with oil) (kg)
					0 (bar)	50 (bar)	350 (bar)	700 (bar)		
SPA-554TQJ	雙速 TWO-Speed	85/90	2.2 (4)	單動或雙動 Single- and Double Acting	12.0	7.1	2.0	0.9	8	27.5