SPM 一體式液壓拉拔器

- 高強度合金鋼鍛造。
- 四段可摺疊及可移除把手，便於操作。
- 360˚旋轉座。
- 拉拔器本體配有安全閥及紅色警告線。
- 液壓缸硬鉻處理強化線性力。
- 中心螺帽彈簧荷重易於使用。
- 2/3爪頂部套環表面染黑，耐久及防銹。
- 熟處理合金鋼鍛造的連接螺栓及爪表面並染黑處理，以防銹及增加使用壽命。
- 延長桿設計，適用範圍廣。
- 材質永久保固。
- 爪部荷載額定荷載120%以上。
- 各型號均附防護罩及收納工具箱。

Hydraulic Pullers

※Forge high strength alloy steel.
※Four stages of foldable & removable handle saves he handle force during operation.
※360˚Rotary Socket.
※Puller body is with integral safety valve and red warning line.
※Chrome plated cylinder provides linear force.
※Spring loaded live center nut for easy job(removable).
※2/3 jaws combination puller cross head with manganous-phosphate plated for rust proof and durability.
※Heat treated forged alloy steel cross bolt & jaws with manganous-phosphate plated for rust proof and long life service.
※Extend plunger easy to work.
※Material lifetime warranty.
※120% capacity for jaws.
※All model equipment with protective net and box.

SPM-1200







延長桿
Extend plunger

收納工具箱
Stock box

紅色警告線
Red warning line

防護罩
Protective net

型 號 Model No.	能力 Cap. ton (kN)	揚程 Stroke A(mm)	受壓面積 Eff. Area (cm^2)	最大爪深 Max. Reach (mm)	最大爪距 Max. Spread (mm)	頂端 Tip (mm) B	C	D	爪端 Jaw Tip (mm) A1	B1	C1	重量 Weight (kg)
SPM-600	6 (563)	70	8.04	245	330	45	23	91	13	10	22	6.1
SPM-800	8 (793)	85	11.34	230	350	55	26	112	11	10	25	8.4
SPM-1200	12 (1011)	85	14.45	260	375	60	28	118	14	10	29	10.5
SPM-2000	20 (1978)	111	28.26	350	520	80	40	162	20	27	33	24.5
SPM-3000	30 (2940)	111	42.00	435	550	98	50	155	20	27	38	37.3

BT 培林拔套

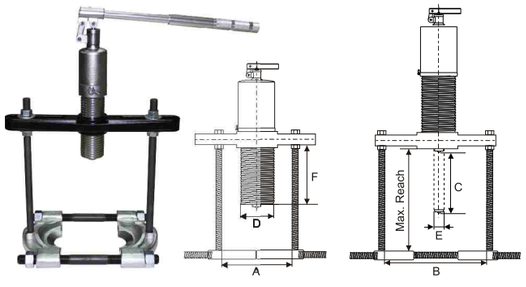

- 高強度合金鋼鍛造。
- 表面鍍鉻、熱處理，防銹增加使用壽命。

Universal Bearing Attachments

※Forged of high strength steel alloy.
※Heat treated, Chrome plated for rust proof and durable life.

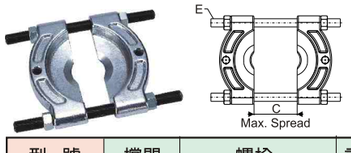

型 號 Model No.	能力 Cap. ton (kN)	揚程 Stroke (mm)	爪深 Max. Reach (mm)	爪距 Spread (mm) A	B	頂端 Tip (mm) D	E	F	重量 Wt. (kg)
SPM-610	6 (563)	70	270	80	180	45	23	91	7.3
SPM-810	8 (793)	85	270	110	220	55	26	112	12.9
SPM-1210	12 (1011)	85	381	146	290	60	28	118	21.9

適用的培林拔套
Suitable bear attachments

型 號 Model No.	撐開 Spread (mm) C	螺栓 Bolt (mm) E	重量 Wt. (kg)
BT-9000	30-50	3/8"-24T-L120mm	0.6
BT-9005	50-75	1/2"-20T-L135mm	1.5
BT-9015	75-105	5/8"-18T-L230mm	2.5
BT-9025	105-150	3/4"-16T-L275mm	5.2
BT-9035	150-200	1"-12T-L350mm	10.6

SPM 一體式液壓拉拔器-選配 Hydraulic Pullers-Optional

SPM-__00系列
SPM-__00 TYP.

SPM-__10系列
SPM-__10 TYP.

SPM-__30 系列
SPM-__30 Series

選配防護蓋 Opt protect cover
XXSPR-6
XXSPR-8
XXSPR-12









整體型號 Model Number	油缸組 Cylinder Model Number	爪部拉組 Jaws Assembly Model Number	培林支撐組 Bearing Assembly Model Number	壓床支撐組 Press Assembly Model Number
SPM-600	SPM-A-600	SPR6-A-A2		
SPM-800	SPM-A-800	SPR8-A-A2		
SPM-1200	SPM-A-1200	SPR12-A-A2		
SPM-2000	SPM-A-2000	SPR20-A-A2		
SPM-3000	SPM-A-3000	SPR30-A-A2		
SPM-610	SPM-A-600		SPM-A-620	
SPM-810	SPM-A-800		SPM-A-820	
SPM-1210	SPM-A-1200		SPM-A-1220	
SPM-620	SPM-A-600	SPR6-A-A2	SPM-A-620	
SPM-820	SPM-A-800	SPR8-A-A2	SPM-A-820	
SPM-1220	SPM-A-1200	SPR12-A-A2	SPM-A-1220	
SPM-630	SPM-A-600			SPM-A-630
SPM-830	SPM-A-800			SPM-A-830
SPM-1230	SPM-A-1200			SPM-A-1230

選配 Optional

SK3 三角壓盤

Universal Bearing Attachments


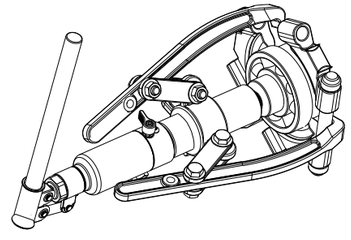
型 號 Model No.	撐開 Spread (mm) B	螺栓 Bolt (mm) C	重量 Wt. (kg)
Sk3-50	φ13.5-50.5	M10*P1.25-L32mm	0.5
SK3-100	φ 26.3-100	M16*P2 - L64mm	2.5
SK3-160	φ 49 - 160	M22*P2.5-L96mm	6.1