



CFP-800-1


Foot Pump

- ◆ High-pressure single-hole operative pump with high and low two-section quick oil output, the maximum output pressure 700kgf / cm² (10000psi).
- ◆ Fast, easy to carry, suitable for non-power state workplace.
- ◆ Pressure can be kept stopped, the pump internal design with high-pressure safety device.
- ◆ With 2M high pressure hose.
- ◆ Applicable Oil: R32 special circle oil.

CFP-800-1-G

Foot Pump with Oil Gauge

- ◆ High-pressure single-hole operative pump with high and low two-section quick oil output, the maximum output pressure 700kgf / cm² (10000psi).
- ◆ Fast, easy to carry, suitable for non-power state workplace.
- ◆ Pressure can be kept stopped, the pump internal design with high-pressure safety device.
- ◆ With the high pressure oil gauge to read the working pressure value, to avoid overloading.
- ◆ With 2M high pressure hose.
- ◆ Applicable Oil: R32 special circle oil.

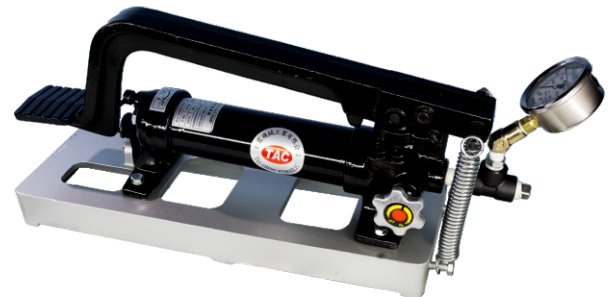

CFP-800-1-D

Double-Action Foot Pump



- ◆ High-pressure hand pump, hydraulic tool can be used with single and double-holes, manual type, high and low two-section oil provide quickly, with manually switch four-direction, three-position valve.
- ◆ In case of large-tonnage hydraulic press or long-stroke (Ex: more than 50 Ton, or above 120 mm stroke), due to the limited spring tension, oil return slowly, so use double acting hydraulic pump to increase the oil return speed.
- ◆ The maximum working pressure is 700kgf / cm² (10000psi) both in and out oil, so the oil return can also produce the same tonnage.
- ◆ Fast, easy to carry, suitable for non-power state workplace.
- ◆ Pressure can be kept stopped, the pump internal design with high-pressure safety device.
- ◆ With 2M high pressure hoses.
- ◆ Applicable Oil: R32 special circle oil.

Item	Max. Output Pressure (kg/cm ² / psi)	Output Pressure (kg/cm ²)	Output Oil (L/min)	Oil storage (cc)	Net Weight (kg)	Size:LxWxH (mm)
CFP-800-1	700 / 10000	Low 0 - 25 High 25-700	Low 13 High 2.3	400	10.4	480X155X250
CFP-800-1-G	700 / 10000	Low 0 - 25 High 25-700	Low 13 High 2.3	400	10.9	590X155X250
CFP-800-1-D	700 / 10000	Low 0 - 25 High 25-700	Low 13 High 2.3	400	12	650X155X250



CFP-800

Large Oil Capacity Foot Pump

- ◆ High-pressure single-hole operative pump with high and low two-section quick oil output, the maximum output pressure 700kgf / cm² (10000psi).
- ◆ Fast, easy to carry, suitable for non-power state workplace.
- ◆ Pressure can be kept stopped, the pump internal design with high-pressure safety device.
- ◆ With 2M high pressure hose.
- ◆ Oil storage capacity, suitable for large tonnage or long stroke hydraulic tools.
- ◆ Applicable Oil: R32 special circle oil.

CFP-800-G

Large Oil Capacity Foot Pump with Oil Gauge


- ◆ High-pressure single-hole operative pump with high and low two-section quick oil output, the maximum output pressure 700kgf / cm² (10000psi).
- ◆ Fast, easy to carry, suitable for non-power state workplace.
- ◆ Pressure can be kept stopped, the pump internal design with high-pressure safety device.
- ◆ With the high pressure oil gauge to read the working pressure value, to avoid overloading.
- ◆ With 2M high pressure hose.
- ◆ Oil storage capacity, suitable for large tonnage or long stroke hydraulic tools.
- ◆ Applicable Oil: R32 special circle oil.



CFP-800-D

Double-Action, Large Oil Capacity Foot Pump

- ◆ High-pressure hand pump, hydraulic tool can be used with single and double-holes, manual type, high and low two-section oil provide quickly, with manually switch four-direction, three-position valve.
- ◆ In case of large-tonnage hydraulic press or long-stroke (Ex: more than 50 Ton, or above 120 mm stroke), due to the limited spring tension, oil return slowly, so use double acting hydraulic pump to increase the oil return speed.
- ◆ The maximum working pressure is 700kgf / cm² (10000psi) both in and out oil, so the oil return can also produce the same tonnage.
- ◆ Fast, easy to carry, suitable for non-power state workplace.
- ◆ Pressure can be kept stopped, the pump internal design with high-pressure safety device.
- ◆ With 2M high pressure hoses.
- ◆ Oil storage capacity, suitable for large tonnage or long stroke hydraulic tools.
- ◆ Applicable Oil: R32 special circle oil.

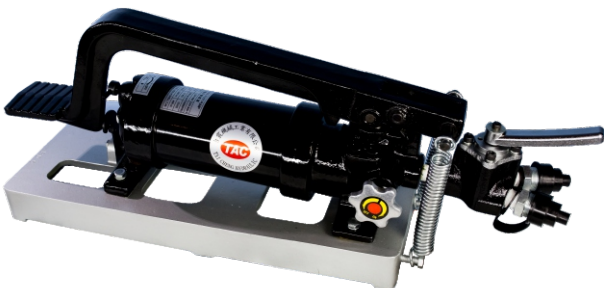

Item	Max. Output Pressure (kg/cm ² /psi)	Output Pressure (kg/cm ²)	Output Oil (L/min)	Oil storage (cc)	Net Weight (kg)	Size:LxWxH (mm)
CFP-800	700 / 10000	Low 0 - 25 High 25-700	Low 13 High 2.3	1200	12.6	480x155x250
CFP-800-G	700 / 10000	Low 0 - 25 High 25-700	Low 13 High 2.3	1200	13.1	590x155x250
CFP-800-D	700 / 10000	Low 0 - 25 High 25-700	Low 13 High 2.3	1200	14.2	650x155x250